


B-SERIES WASHOUT RESISTANT MANIFOLDS

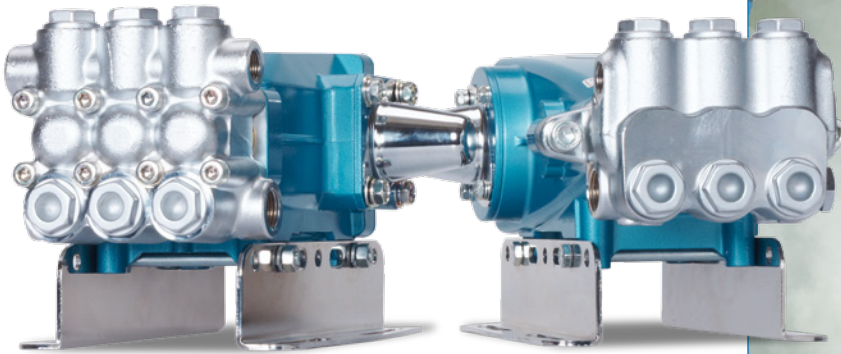

Field-Proven to Prevent Manifold Washout

Cat Pumps "B" series special formulated brass manifolds are designed to prevent manifold washouts. Washouts are caused by chemically induced material erosion that results in a variety of equipment problems, including pump leakage, loss of flow and pressure.

Cat Pumps engineers solved the washout problems with the "B" series manifolds. These manifolds are constructed from corrosion resistant alloys, chrome plated finishes and superior sealing surfaces. This field tested design is backed with a lifetime warranty against washout and freezing*.

Customers can upgrade to the "B" series manifold with the purchase of a complete B-Series pump or a field retrofit kit. (See pump specifications on next page.)

With "B" manifolds, there is no reason to deal with manifold washouts any longer. Maximize uptime and keep running with Cat Pumps by specifying "B" manifolds.

Features

- Superior corrosion resistant alloy provides long service life and trouble-free operation
- Superior resistance to stress cracking
- Chrome plated finish provides wear and discoloration protection
- Field-proven design with thousands of successful installations
- Lifetime warranty against washout and freezing* (Self-service or prep unit car wash applications)

*See warranty details outlined in warranty statement at www.catpumps.com or contact Cat Pumps.

B Series Specifications

Model	Flow		Pressure		RPM	Drive Type
310B	4.0 gpm	15 lpm	100 to 2200 psi	6.9 to 152 bar	950	Belt
<i>Alternate Spec</i>	5.0 gpm	19 lpm	100 to 1500 psi	6.9 to 103 bar	1190	Belt
340B	4.0 gpm	15 lpm	100 to 1800 psi	6.9 to 124 bar	1725	Direct Drive
350B	5.0 gpm	19 lpm	100 to 1500 psi	6.9 to 103 bar	1725	Direct Drive
5CP2120B	4.0 gpm	15 lpm	100 to 2500 psi	6.9 to 172 bar	950	Belt
5CP2140BCS	4.0 gpm	15 lpm	100 to 2500 psi	6.9 to 172 bar	1725	Direct Drive
5CP2150B	5.0 gpm	19 lpm	100 to 2000 psi	6.9 to 138 bar	1725	Direct Drive

Retrofit Your Standard Pump Today

For Models	Order Manifold Only	- or -	Order Complete Head
310, 340, 350	49721		818471
5CP2120W, 5CP2140WCS, 5CP2150W	49716		818472

Popular Accessories



Regulator
PN 7003
0.5 – 5 gpm
1500 – 3000 psi



Unloader
PN 7694
2.5 – 10.5 gpm
400 – 4050 psi



Pop-Off Valve
PN 33962
0 – 6 GPM
1000 – 4000 PSI



Pressure Gauge
PN 6088
0 – 3000 PSI



Oil
PN 6107
21 oz. Bottle
Specially Formulated for
Extended Protection

Contact Cat Pumps for more information at info@catpumps.com or 763-780-5440



CAT PUMPS
1681 - 94TH LANE N.E. MINNEAPOLIS, MN 55449-4324
PHONE (763) 780-5440 — FAX (763) 780-2958
e-mail: techsupport@catpumps.com
www.catpumps.com