


MODEL 3560 PLUNGER PUMP

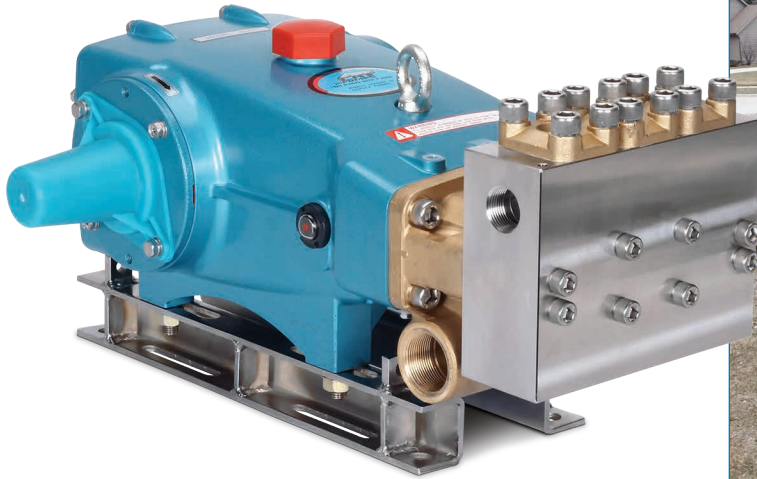

20 GPM | 4,000 PSI
25 GPM | 3,000 PSI (Alternate)

Maximize Uptime with Cat Pumps

Cat Pumps model 3560 is accepted as an industry standard for high-pressure/mid-to-high flow applications. Its dependable performance keeps equipment running to meet production requirements and tight schedules. Given its durability, the 3560 is widely used in a variety of mobile and industrial applications, such as hydroexcavating, jetting, hydroblasting, central cleaning, equipment washdown, among others.

Cat Pumps engineers have optimized every detail to produce a dependable pump with excellent service life. Concentric, high-density polished solid plungers provide a true wear surface that result in long seal life. The drive-end uses matched connecting rods and oversized bearings to provide long trouble-free service. The 3560 is what you expect from Cat Pumps – high quality, dependable products backed by the industry's best customer service and support.

Features:

- Crankcase crosshead area is concentric with 360° plunger rod support and features drilled-through oil port to lubricate front side of crosshead area, resulting in long, reliable drive-end performance.
- Two-coat electrostatic applied primer + epoxy paint finish provides a more durable finish than anodizing for better appearance and durability in outdoor environments.
- Flexible drive options:
 - Belt drive to engine or motor
 - Direct drive to hydraulic motor


Typical Applications:

- Hydroexcavating
- Water Jetting
- Surface Preparation
- Central Cleaning Systems
- Equipment Washdown
- High-Flow/Pressure Flushing
- Multi-Gun Systems

Specifications

	US Measure	Metric Measure		US Measure	Metric Measure
Flow	20 gpm	76 lpm	Inlet Pressure Range	Flooded to 70 psi	Flooded to 4.8 bar
Flow (Alternate)	25 gpm	95 lpm	Max Liquid Temp	160°F	71°C
Pressure	4,000 psi	275 bar	Inlet Ports (2)	1 1/2" NPT(F)	1 1/2" NPT(F)
Pressure (Alternate)	3,000 psi	207 bar	Discharge Ports (2)	1" NPT(F)	1" NPT(F)
RPM	1160 rpm	1160 rpm	Weight	142 lbs	64.4 kg
RPM (Alternate)	1450 rpm	1450 rpm	Dimensions	23.54 x 18.11 x 9.88"	598 x 460 x 251 mm

Dimensions

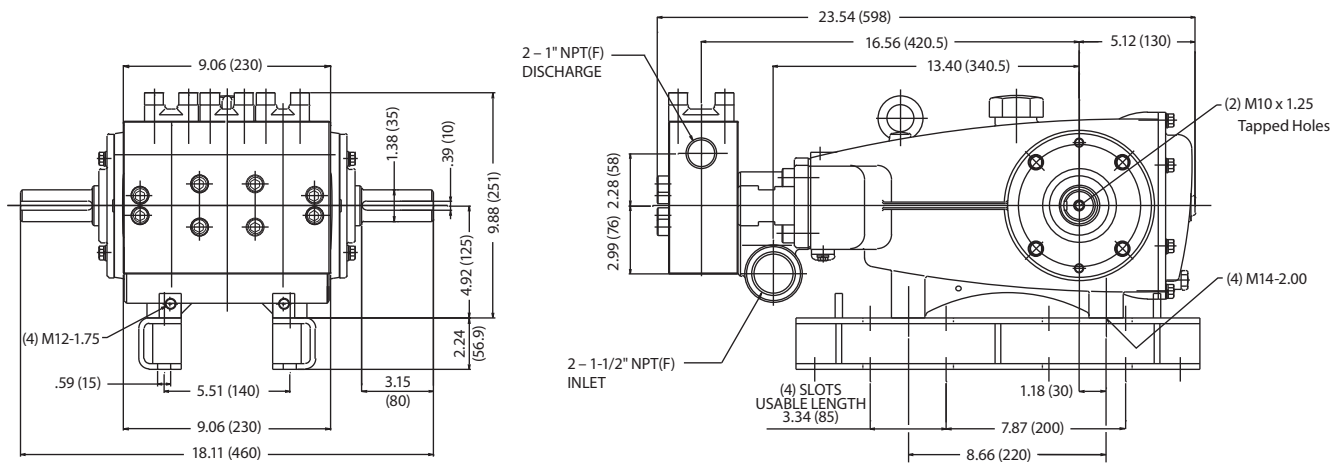

Popular Accessories



Pressure Regulator

PN 7593
10 – 52 GPM
750 – 4,050 PSI



Pop-Off Valve

PN 9940
0 – 25 GPM
1,000 – 4,000 PSI



Pressure Gauge

PN 6089
0 – 6,000 PSI



Filter

PN 7108.8
60 GPM Max
1-1/2" NPT(F)



Bell Housing

PN 76SAEC.35FR
2 or 4 Bolt SAE C
Hydraulic Motors

Contact Cat Pumps for more information at info@catpumps.com or 763-780-5440



CAT PUMPS

1681 - 94TH LANE N.E. MINNEAPOLIS, MN 55449-4324
PHONE (763) 780-5440 — FAX (763) 780-2958
e-mail: info@catpumps.com
www.catpumps.com