


NEW PRODUCTS

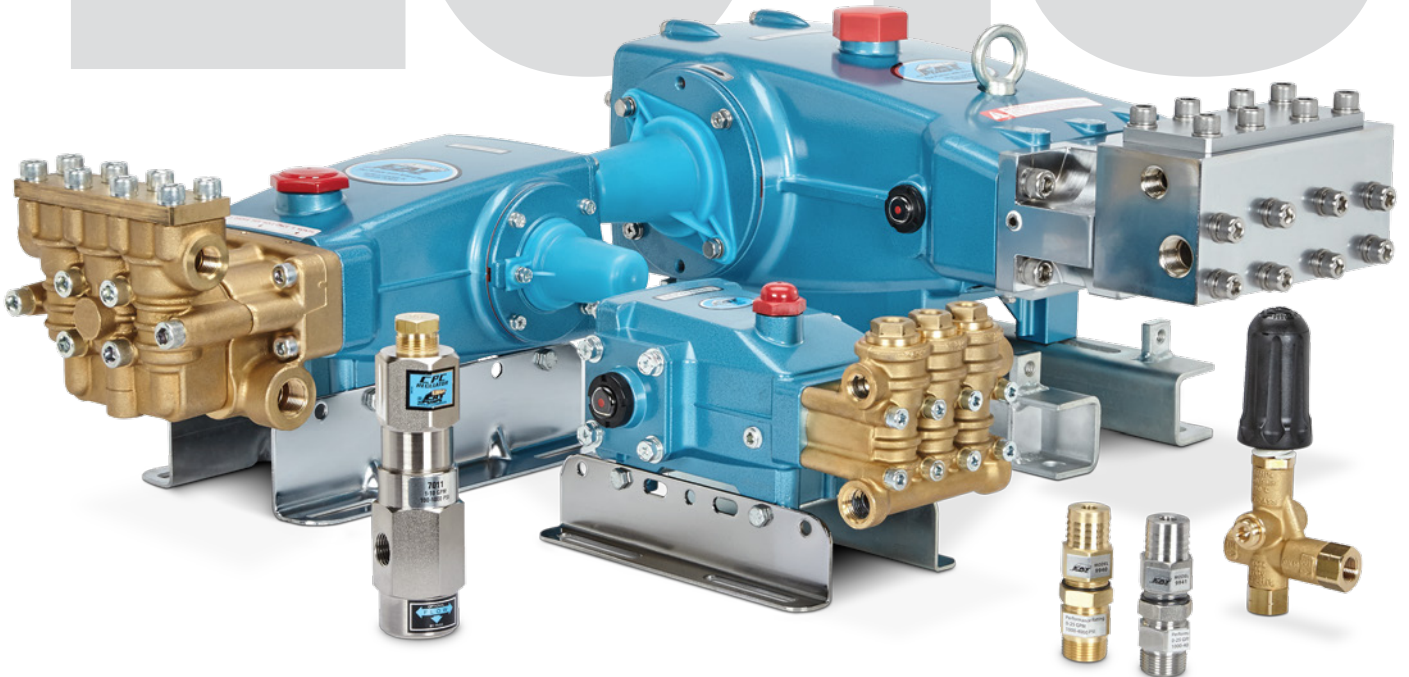

Product Quality, Reliability and Support You Expect

www.catpumps.co.uk

New Products from Cat Pumps

Cat Pumps continues to build on its market leading position with the introduction of new products. Every new product is built with the same winning business philosophy: manufacture the longest-lasting most dependable products and back them with availability from stock. Contact us to learn why customers worldwide trust Cat Pumps to keep their equipment running.



SPECIFICATIONS

TYPICAL APPLICATIONS

5SP30ELU

Max Flow: 3.0 gpm / 11.4 lpm

Max Pressure: 3000 psi / 207 bar

5SP35ELU

Max Flow: 3.5 gpm / 13.3 lpm

Max Pressure: 2500 psi / 172 bar

5SP40ELU

Max Flow: 4.0 gpm / 15.2 lpm

Max Pressure: 2000 psi / 138 bar

Common Specifications

Max RPM: 1750


Inlet Port: 1/2" NPT(F)

Accessory Ports (3): 1/4" NPT(F)

Discharge Port: 3/8" NPT(M)

Mounting: 184TC Direct Drive

- Pressure washing
- Misting/fogging
- Odor Control



5CP6180CSS

Max Flow: 8.2 gpm / 31 lpm


Max Pressure: 1500 psi / 103 bar

Max RPM: 1750

Inlet Ports (2): 1/2" NPT(F)

Discharge Ports (2): 3/8" NPT(F)

- Car wash prep unit
- Undercarriage wash
- High-pressure wash



3550

Max Flow: 10.0 gpm / 38.0 lpm

Max Pressure: 6000 psi / 414 bar

Max RPM: 940


Inlet Ports (2): 3/4" NPT(F)

Discharge Ports (2): 1/2" NPT(F)


- High-pressure injection
- Waterblasting and washdown
- Hydrostatic testing

SPECIFICATIONS**TYPICAL APPLICATIONS****1580**

Max Flow:	12.0 gpm / 45.4 lpm	<ul style="list-style-type: none"> • Multi-gun wash down • Hydroexcavating • Equipment cleaning
Max Pressure:	3000 psi / 207 bar	
Max RPM:	1180	
Inlet Ports (2):	3/4" NPT(F)	
Discharge Ports (2):	1/2" NPT(F)	


**3570**

Max Flow:	30.0 gpm / 114 lpm	<ul style="list-style-type: none"> • Waterjetting • Hydroexcavating • High-pressure washdown
Max Pressure:	3000 psi / 207 bar	
Max RPM:	1080	
Inlet Ports (2):	1 1/2" NPT(F)	
Discharge Ports (2):	1" NPT(F)	

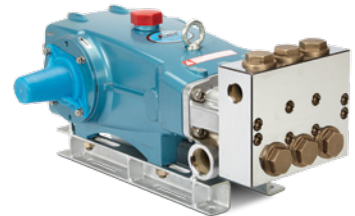
**67070**

Max Flow:	65.0 gpm / 246 lpm*	<ul style="list-style-type: none"> • Sewer Jetting • Hydroexcavating • Other high-flow, high pressure cleaning
Alt. Flow:	50.0 gpm / 189 lpm	
Max Pressure:	2000 psi / 138 bar*	
Alt. Pressure:	2000 psi / 138 bar	
Max RPM:	850	
Alt RPM:	653	
Inlet Ports (2):	2" NPT(F)	
Discharge Ports (2):	1-1/4" NPT(F)	

*Intermittent Duty

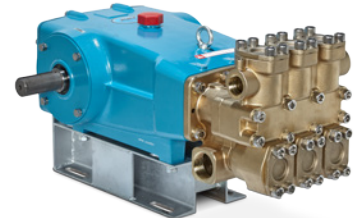**67102 and 67102C with Seal Flush**

Max Flow:	100 gpm / 378.5 lpm	<ul style="list-style-type: none"> • Salt and brackish water desalination (SWRO) • Central cleaning systems • High-flow washdown
Alt Flow:	80 gpm / 302.8 lpm	
Max Pressure:	1000 psi / 69 bar	
Alt Pressure:	1200 psi / 83 bar	
Max RPM:	680	
Alt RPM:	540	
Inlet Ports (2):	2 1/2" NPT(F)	
Discharge Ports (2):	2" NPT(F)	

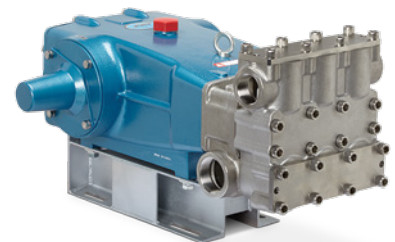



SPECIFICATIONS

TYPICAL APPLICATIONS

75S075 Stainless Steel Inlet Regulator

Flow Range	0 - 12 gpm / 0 - 45 lpm
Inlet Port:	3/4" NPT(F)
Discharge Port:	3/4" NPT(F)

75S100 Stainless Steel Inlet Regulator

Flow Range	0 - 20 gpm / 0 - 76 lpm
Inlet Port:	1" NPT(F)
Discharge Port:	1" NPT(F)

75S150 Stainless Steel Inlet Regulator

Flow Range	0 - 50 gpm / 0 - 189 lpm
Inlet Port:	1 1/2" NPT(F)
Discharge Port:	1 1/2" NPT(F)

75S200 Stainless Steel Inlet Regulator

Flow Range	0 - 75 gpm / 0 - 284 lpm
Inlet Port:	2" NPT(F)
Discharge Port:	2" NPT(F)

Common Specifications

Max. Inlet Pressure:	350 psi / 24 bar
Pump Inlet Pres. Range:	15 - 85 psi / 1.03 - 5.86 lpm
Temperature Range:	-5 - 212° F / 15 - 100° C

- Ideal for positive displacement pump systems
- Easy access for pressure adjustment
- Convenient in-line style mounts either horizontally or vertically



7561 Pressure Regulator

Flow Range:	0 - 4 gpm / 0 - 15.1 lpm
Pressure Range:	100 - 1000 psi / 6.9 - 69 bar
Inlet Port:	1/4" NPT(M)
Outlet Port	1/4" NPT(F)
By-Pass Port:	1/4" NPT(F)

- Ultra compact
- Designed for low flow applications
- Quiet and consistent operation



7410 Pressure Regulator

Flow Range:	10 - 100 gpm / 37.9 - 378.5 lpm
Pressure Range:	100 - 1500 psi / 6.9 - 103 bar
Inlet/Outlet Ports:	1 1/2" NPT(F)
By-Pass Port:	2" NPT(F)
Accessory Port:	1/4" NPT(F)

- Maintains consistent system pressure between 100 and 1500 psi
- 316 Stainless Steel for superior corrosion resistance

Contact Cat Pumps for more information at www.catpumps.co.uk or (01252) 622031



CAT PUMPS (U.K.) LTD.
 1 FLEET BUSINESS PARK, SANDY LANE, CHURCH CROOKHAM
 FLEET, HAMPSHIRE GU52 8BF, ENGLAND
 P: +44 1252 622031 • F: +44 1252 626655
sales@catpumps.co.uk • technical@catpumps.co.uk • www.catpumps.co.uk