


Pump Quick Reference Chart




Thank you for your interest in Cat Pumps, the world leader in triplex positive displacement pumps. This quick reference guide is organised by manifold material and the following criteria:

- Plunger Pumps
 - Direct Drive – Electric Motor
 - Direct Drive – Engine
 - Solid Shaft
- Piston Pumps
- Flushed Manifold Pumps

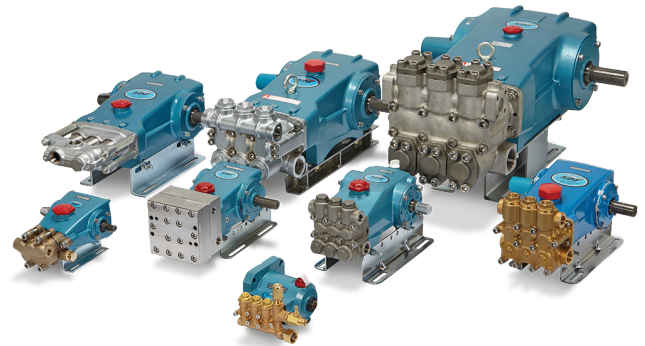

Plunger Pumps Direct Drive, Electric Motor


BRASS MANIFOLD

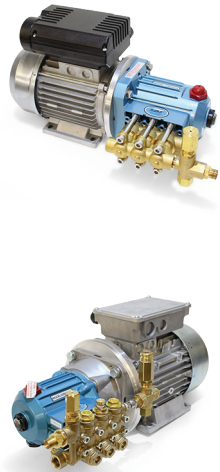

MODEL	MAX FLOW		MAX PRESSURE		RPM	Kw	DRIVE TYPE*
	GPM	LPM	PSI	BAR			
4DX03ELR	0.3	1.1	2000	138	1725	0.4	HS
2SF10ES	1.0	3.8	2000	138	3450	1.0	HS
4DX10ER	1.0	3.8	2000	138	3450	1.0	HS
4DX15ER	1.5	5.7	2000	138	3450	1.6	HS
2SF20ES	2.0	7.6	2000	138	3450	2.0	HS
4DX20ER	2.0	7.6	2000	138	3450	2.0	HS
4SP21ELR	2.1	7.9	2000	138	1750	2.2	HS
2SF22ELS	2.2	8.3	2000	138	1725	2.2	HS
2SF22ES	2.2	8.3	2000	138	3450	2.2	HS
5CP4110CSS	2.2	8.3	4000	275	1750	4.5	CC
3CP1130	2.4	9.1	2200	152	1725	2.7	CC
5CP3105CSS	2.5	9.5	3500	241	1750	4.5	CC
4DX27ER	2.7	10.2	2000	138	3450	2.8	HS
5CP4112CSS	2.7	10.2	4000	275	1750	5.5	CC
4SP29ELR	2.85	10.8	1200	83	1725	1.8	HS
2SF29ELS	2.9	10.8	1500	103	1725	2.2	HS
740	2.9	11.0	5000	345	1750	7.4	CC
2SF30ES	3.0	11.4	1500	103	3450	2.3	HS
4DX30ER	3.0	11.4	2000	138	3450	3.1	HS
2SF30GES	3.0	11.4	2000	138	3450	3.1	HS
5SP30ELR	3.0	11.4	3000	207	1750	4.6	HS
5CP4114CSS	3.2	12.1	4000	275	1750	6.6	CC
2SF35ES	3.5	13.3	1500	103	3450	2.7	HS
2SF35GES	3.5	13.3	2000	138	3450	3.6	HS
5SP35ELR	3.5	13.3	2500	172	1750	4.5	HS
3CP1140	3.6	13.7	2200	152	1725	4.0	CC
5CP3110CSS	3.6	13.7	3500	241	1750	6.4	CC
760	3.6	13.7	5000	345	1750	9.2	CC
5CP4116CSS	3.8	14.4	4000	275	1750	7.8	CC
340	4.0	15.1	1800	124	1725	3.7	CC
5SP40ELR	4.0	15.1	2000	138	1750	4.1	HS
5CP2140WCS	4.0	15.1	2500	172	1725	5.1	CC
3CP1120	4.2	15.9	2200	152	1725	4.7	CC
5CP4118CSS	4.2	15.9	4000	275	1750	8.6	CC
5CP3160CSS	4.3	16.3	3500	241	1750	7.7	CC
5CP4120CSS	4.5	17.1	4000	275	1750	9.2	CC
60	4.7	17.9	4000	275	1750	9.6	CC
700	4.7	17.9	5000	345	1750	12.0	CC

*HS – Hollow Shaft, 5/8" or 1 1/8" CC - Close Coupled, Bell Housing

Plunger Pumps Direct Drive, Electric Motor – Continued



BRASS MANIFOLD (CONTINUED)

MODEL	MAX FLOW		MAX PRESSURE		RPM	Kw	DRIVE TYPE*
	GPM	LPM	PSI	BAR			
5CP3120	4.8	18.2	3000	207	1750	7.4	CC
2SFP500EL	5.0	19.0	500	34.5	1750	1.3	HS
350	5.0	19.0	1500	103	1725	3.8	CC
5CP2150W	5.0	19.0	2000	138	1725	5.1	CC
5CP3150CSS	5.2	19.8	3000	207	1750	8.0	CC
5CP5120	6.0	22.8	2500	172	1750	7.7	CC
5CP5135CSS	6.0	22.8	3000	207	1750	9.2	CC
5CP5140CSS	6.4	24.3	3000	207	1750	9.8	CC
5CP6120	7.4	28.1	1500	103	1725	5.7	CC
56	8.0	30.3	2500	172	1760	10.2	CC
56HS	8.0	30.3	3000	207	1760	12.2	CC
5CP6180CSS	8.2	31.0	1500	103	1750	6.3	CC
5CP6190	10.0	38.0	1200	83	1750	6.1	CC
7CP6110CS	10.5	39.9	2000	138	1750	10.7	CC
7CP6160CS	10.6	40.1	2500	172	1750	13.6	CC


*HS – Hollow Shaft, 5/8" or 1 1/8" CC – Close Coupled, Bell Housing



NICKEL ALUMINIUM BRONZE MANIFOLD

MODEL	MAX FLOW		MAX PRESSURE		RPM	Kw	DRIVE TYPE*
	GPM	LPM	PSI	BAR			
237	2.3	8.7	1500	103	1725	1.8	CC
247	3.6	13.7	1200	83	1725	2.2	CC
347	4.0	15.1	1200	83	1725	3.7	CC
277	4.2	15.9	1000	69	1725	2.2	CC
357	5.0	19.0	1500	103	1725	3.8	CC

*CC – Close Coupled, Bell Housing




316 STAINLESS STEEL MANIFOLD

MODEL	MAX FLOW		MAX PRESSURE		RPM	Kw	DRIVE TYPE*
	GPM	LPM	PSI	BAR			
2SF05SEEL	0.5	1.9	1200	83	1725	0.3	HS
2SF10SEEL	1.0	3.8	1200	83	1725	0.6	HS
2SF15SEEL	1.5	5.7	1200	83	1725	0.9	HS
2SF22SEEL	2.2	8.3	1200	83	1725	1.3	HS
3CP1231	2.3	8.7	2000	138	1725	2.4	CC
2SFQ25SEEL	2.5	9.5	1200	83	1725	1.6	HS
2SFQ29SEEL	2.9	10.8	1200	83	1725	1.7	HS
784	2.9	11.0	5000	345	1750	7.4	CC
301	3.2	12.1	2200	152	1725	3.6	CC
2SFQ35SEEL	3.5	13.3	1200	83	1725	2.2	HS
3CP1241	3.6	13.7	2000	138	1725	3.7	CC
786	3.6	13.7	5000	345	1750	9.2	CC
341	4.0	15.1	1800	124	1725	3.7	CC
5CPQ6241CS	4.0	15.1	2000	138	1725	4.1	CC
2SFQ42SEEL	4.2	15.9	1200	83	1725	2.6	HS
3CP1221	4.2	15.9	2000	138	1725	4.3	CC
781	4.7	17.8	5000	345	1750	12.0	CC
351	5.0	19.0	1500	103	1725	3.8	CC
3CP1211CS	5.0	19.0	1700	117	1750	4.3	CC
5CPQ6251	5.0	19.0	2000	138	1725	5.1	CC
5CPQ6281CSS	5.5	21.0	2000	138	1725	5.6	CC
5CPQ6271CSS	6.6	25.0	1800	124	1725	6.0	CC
5CPQ6221	7.4	28.0	1200	83	1725	4.6	CC
7CP6111CS	10.5	39.9	2000	138	1750	10.7	CC

*HS – Hollow Shaft, 5/8" or 1 1/8" CC – Close Coupled, Bell Housing

Plunger Pumps Direct Drive, Engine Driven




BRASS MANIFOLD

MODEL	MAX FLOW		MAX PRESSURE		ENGINE RPM	SHAFT
	GPM	LPM	PSI	BAR		
4DNX25GSI	2.5	9.5	3000	207	3450	3/4"
4DNX27GSI	2.7	10.3	3000	207	3450	3/4"
740G1*	2.8	10.6	5000	345	3465	1"
4DX29GUIF	2.9	11.0	2600	179	3450	3/4"
2SF30GS	3.0	11.4	2000	138	3450	3/4"
2SFX30GZ	3.0	11.4	2500	172	3450	3/4"
66DX30GII	3.0	11.4	4000	275	3450	1"
4SPX32GII	3.2	12.1	3000	207	3450	1"
2SF35GS	3.5	13.3	2000	138	3450	3/4"
3CP1120G*	3.5	13.3	2200	152	3600	3/4"
66DX35GII	3.5	13.3	4000	275	3450	1"
760G1*	3.5	13.3	5000	345	3465	1"
5CP3160CSSG1*	4.0	15.1	3500	241	3320	1"
66DX40GII	4.0	15.1	4000	275	3450	1"
60G1*	4.5	17.0	4000	275	3450	1"
5CP3120CSSG1*	4.5	17.1	3500	241	3353	1"
45G1*	4.5	17.1	3500	241	3353	1"
700G1*	4.5	17.1	5000	345	3465	1"
5CP3150CSSG1*	5.0	18.9	3000	207	3450	1"
66DX50GII	5.0	18.9	3500	241	3400	1"
5CP5135CSSG1*	5.8	21.9	3500	241	3450	1"
5CP5140CSSG1*	6.2	23.4	3000	207	3450	1"
5CP6120CSSG1*	7.2	27.2	1500	103	3450	1"
5CP6180CSSG1*	8.0	30.3	1500	103	3450	1"
56G1*	8.0	30.3	2500	172	3600	1"
56HSG1*	8.0	30.3	3000	207	3600	1"
5CP6190G1*	9.7	36.7	1200	83	3450	1"
7CP6110CSG1*	10.0	38.0	2000	138	3400	1"
7CP6160CSG1*	10.0	38.0	2500	172	3400	1"
7CP6170G1*	12.0	45.4	1800	124	3264	1"

*Gearbox drive, pump runs approximately half of engine speed. All 1" gearboxes also available with 1 1/8" shaft


316 STAINLESS STEEL MANIFOLD



MODEL	MAX FLOW		MAX PRESSURE		ENGINE RPM	SHAFT
	GPM	LPM	PSI	BAR		
3CP1241G*	3.0	11.4	2000	138	3600	3/4"
3CP1211G*	3.8	14.4	1500	103	3400	3/4"
5CPQ6241CSG1*	4.0	15.1	2000	138	3600	1"
781G1*	4.5	17.1	5000	345	3465	1"
5CPQ6251G1*	5.0	19.0	2000	138	3600	1"
5CPQ6221G1*	7.4	28.0	1200	83	3600	1"
7CP6111CSG1*	10.0	38.0	2000	138	3400	1"

*Gearbox drive, pump runs approximately half of engine speed. All 1" gearboxes also available with 1 1/8" shaft

Plunger Pumps Solid Shaft



BRASS AND 304 STAINLESS STEEL MANIFOLD

MODEL	MAX FLOW		MAX PRESSURE		RPM	Kw
	GPM	LPM	PSI	BAR		
5CP4110CSS	2.2	8.3	4000	275	1750	4.7
3CP1130	2.4	9.1	2200	152	1725	2.7
5CP3105CSS	2.5	9.5	3500	241	1750	4.5
5CP4112CSS	2.7	10.2	4000	275	1750	5.7
740	2.9	11.0	5000	345	1750	7.4
1810*	3.0	11.4	10000	689	1500	15.3
5CP4114CSS	3.2	12.1	4000	275	1750	6.6
3CP1140	3.6	13.7	2200	152	1725	4.0
5CP3110CSS	3.6	13.7	3500	241	1750	6.4

*17- 4SS Stainless Steel **316 Stainless Steel Discharge Manifold ***Intermittent Duty




Plunger Pumps Solid Shaft – Continued

BRASS AND 304 STAINLESS STEEL MANIFOLD (CONTINUED)

MODEL	MAX FLOW		MAX PRESSURE		RPM	Kw
	GPM	LPM	PSI	BAR		
760	3.6	13.7	5000	345	1750	9.2
5CP4116CSS	3.8	14.4	4000	275	1750	7.8
340	4.0	15.1	1800	124	1725	3.7
310	4.0	15.1	2200	152	950	4.5
5CP2120W	4.0	15.1	2500	172	950	5.1
5CP2140WCS	4.0	15.1	2500	172	1725	5.1
3CP1120	4.2	15.9	2200	152	1725	4.7
5CP4118CSS	4.2	15.9	4000	275	1750	8.6
5CP3160CSS	4.3	16.3	3500	241	1750	7.7
45	4.5	17.1	3500	241	1645	8.1
5CP3120	4.5	17.1	3500	241	1645	8.1
57	4.5	17.1	4000	275	1285	9.2
5CP4120CSS	4.5	17.1	4000	275	1750	9.2
60	4.7	17.9	4000	275	1750	9.6
700	4.7	17.9	5000	345	1750	12.0
5CP3120	4.8	18.2	3000	207	1750	7.4
310	5.0	19.0	1500	103	1190	3.8
350	5.0	19.0	1500	103	1725	3.8
5CP2150W	5.0	19.0	2000	138	1725	5.1
530	5.0	19.0	2500	172	1100	6.4
5CP5120	5.0	19.0	3000	207	1415	7.7
550	5.0	19.0	3000	207	1415	7.7
5CP3150CSS	5.2	19.7	3000	207	1750	7.9
56	5.5	20.9	3500	241	1210	9.8
5CP5140CSS	5.5	20.9	3500	241	1500	9.8
5CP5120	6.0	22.8	2500	172	1750	7.7
5CP5135CSS	6.0	22.8	3500	241	1750	10.7
1570	6.0	22.8	6000	414	1350	18.4
5CP5140CSS	6.4	24.3	3000	207	1750	9.8
650	7.0	26.6	3000	207	1000	10.7
5CP6120	7.4	28.0	1500	103	1725	5.7
5CP6190	8.0	30.3	1450	100	1450	5.9
56	8.0	30.3	2500	172	1760	10.2
56HS	8.0	30.3	3000	207	1760	12.2
5CP6180CSS	8.2	31.0	1500	103	1750	6.3
1560	9.0	34.2	4000	275	1280	16.3
5CP6190	10.0	38.0	1200	83	1750	6.1
1050	10.0	38.0	2200	152	958	11.3
660	10.0	38.0	3000	207	1429	15.3
3550	10.0	38.0	6000	414	940	30.7
6810 *	10.0	38.0	10000	689	600	51.1
7CP6110CS	10.5	39.9	2000	138	1750	10.7
7CP6160CS	10.6	40.1	2500	172	1750	13.6
7CP6170	11.0	41.6	2000	138	1450	11.3
1050	12.3	46.5	1800	124	1180	11.3
7CP6170	12.0	45.4	1800	124	1600	11.0
1580	12.0	45.4	3000	207	1180	18.4
1530	15.6	59.3	1500	103	1450	11.9
1730	15.8	60	1500	103	1750	12.1
2560, 2560BH	16.0	60.6	3000	207	1510	24.5
1540E	19.3	73.0	1200	83	1180	11.8
2510	20.0	76.0	2000	138	1450	20.4
2565, 2565BH	20.0	76.0	2500	172	1450	25.5
3560**	20.0	76.0	4000	275	1160	40.9
2530	25.0	95.0	1200	83	1025	15.3
3520	25.0	95.0	2000	138	870	25.5
3560**	25.0	95.0	3000	207	1450	38.3
3570	30.0	113.6	2500	172	1080	38.3
3570S***	30.0	113.6	3000	207	1080	46.0
3535	36.0	136.0	1200	83	800	22.1
3535HS***	40.0	151.0	2000	138	888	40.9
3545	45.0	171.0	1000	69	765	23.0
3545HS***	50.0	190.0	1500	103	850	38.3
67070	50.0	189.0	2000	138	653	51.1
6760	60.0	228.0	1200	83	520	36.8
67070***	65.0	246.0	2000	138	850	66.4
6775	75.0	285.0	1200	83	650	46.0

*17- 4SS Stainless Steel **316 Stainless Steel Discharge Manifold ***Intermittent Duty

Note: Intermittent Duty Cycle defined as: Operating pump at stated flow and pressure for no more than 50% of time in any given hour.



NICKEL ALUMINIUM BRONZE MANIFOLD

MODEL	MAX FLOW		MAX PRESSURE		RPM	Kw
	GPM	LPM	PSI	BAR		
237	2.3	8.7	1500	103	1725	1.8
277	3.5	13.3	1500	103	1420	2.7
247	3.6	13.7	1200	83	1725	2.2
347	4.0	15.1	1800	124	1725	3.7
317	4.0	15.1	2200	152	950	4.5
277	4.2	15.9	1000	69.0	1725	2.2
357	5.0	19.0	1500	103	1725	3.8
1057	10.0	38.0	2200	152	958	11.3
3507	10.0	38.0	5000	345	915	25.5
1057	12.3	46.5	1800	124	1180	11.3
3517	14.0	53.2	3000	207	800	21.5
2537	25.0	95.0	1200	83	1025	15.3
3527	25.0	95.0	2000	138	870	25.5
3537	36.0	136.0	1200	83	800	22.1
3537HS*	40.0	151.4	2000	138	888	40.9
3547	45.0	170.0	1000	69	765	23.0
6747	48.0	182.4	2000	138	615	49.1
6767	60.0	228.0	1200	83	520	36.8


*Intermittent Duty

Note: Intermittent Duty Cycle defined as: Operating pump at stated flow and pressure for no more than 50% of time in any given hour.



316 STAINLESS STEEL AND DUPLEX STAINLESS STEEL MANIFOLD

MODEL	MAX FLOW		MAX PRESSURE		RPM	Kw
	GPM	LPM	PSI	BAR		
3CP1231	2.3	8.7	2000	138	1725	2.4
784	2.9	11.0	5000	345	1750	7.4
3CP1241	3.6	13.7	2000	138	1725	3.7
786	3.6	13.7	5000	345	1750	9.2
341	4.0	15.1	1800	124	1725	3.7
5CPQ6241CS	4.0	15.1	2000	138	1725	4.1
311	4.0	15.1	2200	152	950	4.5
3CP1221	4.2	15.9	2000	138	1725	4.3
781	4.7	17.9	5000	345	1750	12.0
351	5.0	19.0	1500	103	1725	3.8
3CP1211CS	5.0	19.0	1700	117	1750	4.3
5CPQ6251	5.0	19.0	2000	138	1725	5.1
5CPQ6281CSS	5.5	20.9	2000	138	1725	5.6
5CPQ6221	6.0	22.8	2000	138	1400	6.1
5CPQ6271CSS	6.6	25.1	1800	124	1725	6.0
5CPQ6221	7.4	28.0	1200	83	1725	4.6
1051	10.0	38.0	2200	152	958	11.3
1051D	10.0	38.0	2200	152	958	11.3
661D	10.0	38.0	3000	207	1429	15.3
3501	10.0	38.0	5000	345	915	25.5
3801	10.0	38.0	5000	345	915	25.5
7CP6111CS	10.5	39.9	2000	138	1750	10.7
7CP6171CS	10.5	39.9	2000	138	1450	10.7
1051	12.3	46.5	1800	124	1180	11.3
1051D	12.3	46.5	1800	124	1180	11.3
3511	14.0	53.2	3000	207	800	21.5
3811	14.0	53.2	3000	207	800	21.5
6811	15.0	57.0	5000	345	630	38.3
6801	15.0	57.0	7000	483	630	53.6
1531	15.6	59.3	1500	103	1450	11.9
1541	19.3	73.0	1200	83	1180	11.8
2511	20.0	76.0	1500	103	1450	15.3
2531	25.0	95.0	1200	83	1025	15.3
3521DHS	25.0	95.0	2000	138	870	25.5
6821	25.0	95.0	3000	207	615	38.3
3531D	36.0	136.0	1200	83	800	22.1



Plunger Pumps Solid Shaft – Continued

316 STAINLESS STEEL AND DUPLEX STAINLESS STEEL MANIFOLD (CONTINUED)

MODEL	MAX FLOW		MAX PRESSURE		RPM	Kw
	GPM	LPM	PSI	BAR		
3531DHS*	40.0	151.4	2000	138	888	54.8
6831	40.0	151.4	2300	159	625	63.0
6835	40.0	151.4	3000	207	625	82.2
3541D	45.0	170.0	1000	69	765	30.8
3841	45.0	170.0	1000	69	765	30.8
6841	48.0	182.4	2000	138	615	65.8
3541DHS*	50.0	189.0	1500	103	850	51.4
6761	60.0	228.0	1200	83	520	49.3
6861	60.0	228.0	1200	83	520	49.3
6762	60.0	228.0	1200	83	520	49.3
67102	80.0	302.8	1200	83	540	65.8
67102	100.0	378.5	1000	69	680	68.5
157R060	100.0	378.5	2700	186	310	184.9
152R060	115.0	435.0	1200	83	360	94.5
152R061	115.0	435.0	2000	138	360	157.5
152R080	200.0	757.0	1200	83	355	164.4
152R081	200.0	757.0	1560	108	355	214.0
152R100	240.0	912.0	1000	69	270	164.4

*Intermittent Duty

Note: Intermittent Duty Cycle defined as: Operating pump at stated flow and pressure for no more than 50% of time in any given hour.



Piston Pumps Solid Shaft


BRASS MANIFOLD

MODEL	MAX FLOW		MAX PRESSURE		RPM	Kw
	GPM	LPM	PSI	BAR		
280	3.0	11.4	1000	69	1330	1.6
290	3.5	13.3	1200	83	1200	2.2
333	4.0	15.1	1200	83	1070	2.5
430	5.0	19.0	1000	69	1040	2.5
323	5.0	19.0	1500	103	1000	3.8
623	6.0	22.8	1200	83	850	3.7
820	10.0	38.0	1000	69	940	5.1
390	12.0	45.4	600	41	1200	3.7
1010	13.0	49.4	700	48	900	4.6
2520	25.0	95.0	800	55	772	10.2
6040	40.0	151.4	1500	103	500	30.7
6020	60.0	228.0	1000	69	500	30.7

316 STAINLESS STEEL MANIFOLD

MODEL	MAX FLOW		MAX PRESSURE		RPM	Kw
	GPM	LPM	PSI	BAR		
281	3.0	11.4	1000	69	1330	1.6
291	3.5	13.3	1200	83	1200	2.2
331	4.0	15.1	1200	83	1070	2.5
431	5.0	19.0	1000	69	1040	2.5
621	6.0	22.8	1200	83	850	3.7
821	10.0	38.0	1000	69	940	5.1
1011	13.0	49.4	700	48	900	4.6
6041	40.0	151.4	1500	103	500	30.7
6021	60.0	228.0	1000	69	500	30.7

Specialty Pumps Flushed Manifolds



BRASS, 304 STAINLESS STEEL AND NICKEL ALUMINIUM BRONZE MANIFOLD

MODEL	MAX FLOW		MAX PRESSURE		RPM	Kw
	GPM	LPM	PSI	BAR		
1810K*	3.0	11.4	10000	689	1500	15.3
1530C	15.6	59.0	1500	103	1450	11.9
1540EC	19.3	73.0	1200	83	1180	11.8
2520C	25.0	95.0	800	55	772	10.2
3520C	25.0	95.0	2000	138	870	25.5
3570C	30.0	113.6	2500	172	1080	38.3
3535C	36.0	136.0	1200	83	800	22.1

Model numbers ending in "C" indicate flushed cast manifold and "K" indicate flushed block manifold.

*17- 4SS Stainless Steel



316 STAINLESS STEEL AND DUPLEX STAINLESS STEEL MANIFOLD

MODEL	MAX FLOW		MAX PRESSURE		RPM	Kw
	GPM	LPM	PSI	BAR		
341C	4.0	15.1	1800	124	1725	3.7
311C	4.0	15.1	2200	152	950	4.5
781K	4.7	17.9	5000	345	1750	11.5
351C	5.0	19.0	1500	103	1725	3.8
1051C	10.0	38.0	2200	152	958	11.3
661C	10.0	38.0	3000	207	1429	15.3
3501C	10.0	38.0	5000	345	915	25.5
7CP6171CCS	10.5	39.9	2000	138	1450	10.7
7CP6111CCS	10.5	39.9	2000	138	1750	10.7
1051C	12.3	46.5	1800	124	1180	11.3
3511C	14.0	53.2	3000	207	800	21.5
6811K	15.0	57.0	5000	345	630	38.3
6801K	15.0	57.0	7000	483	630	53.6
1541C	19.3	73.0	1200	83	1180	11.8
2531C	25.0	95.0	1200	83	1025	15.3
3521C	25.0	95.0	2000	138	870	25.5
6821K	25.0	95.0	3000	207	615	38.3
3531C	36.0	136.0	1200	83	800	22.1
3531CHS*	40.0	151.4	2000	138	888	40.9
6831K	40.0	151.4	2300	159	625	47.0
6835K	40.0	151.4	3000	207	625	61.3
3541C	45.0	170.0	1000	69	765	23.0
6841K	48.0	182.4	2000	138	615	49.1
3541CHS*	50.0	189.0	1500	103	850	38.3
6861K	60.0	228.0	1200	83	520	36.8
67102C	100.0	378.5	1000	69	680	51.1
152R060C	115.0	437.0	1200	83	360	70.5
152R080C	200.0	757.0	1200	83	355	122.6
152R100C	240.0	912.0	1000	69	270	122.6

Model numbers ending in "C" indicate flushed cast manifold and "K" indicate flushed block manifold.

*Intermittent Duty

Note: Intermittent Duty Cycle defined as: Operating pump at stated flow and pressure for no more than 50% of time in any given hour.

Browse Our Product Catalogue Online


In addition to this quick reference guide, Cat Pumps website provides links to complete data sheets, service manuals and sales literature; and CAD drawings can also be provided on request.



Engineered Packages

Cat Pumps also offers complete pumping systems to meet a wide range of application needs. Each custom system is built to meet the exact application requirements of the individual customer with the assistance from our technical sales and engineering teams. They can assist in all phases of the build, including gathering application information, component/configuration selection, building and testing, as well as start-up support.

Further information can be found at www.catpumps.co.uk

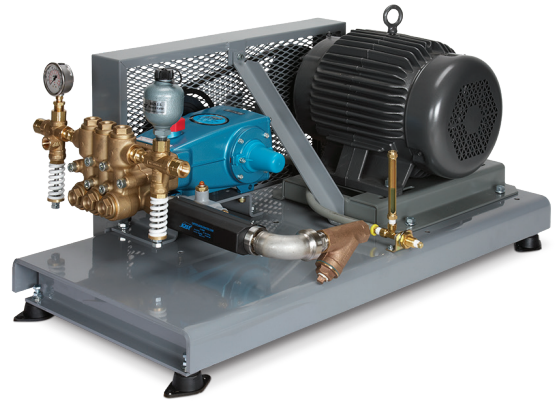

Contact Cat Pumps for more information at sales@catpumps.co.uk or +44 1252 622031.



CAT PUMPS (U.K.) LTD.
1 FLEET BUSINESS PARK, SANDY LANE, CHURCH CROOKHAM
FLEET, HAMPSHIRE GU52 8BF, ENGLAND
P: +44 1252 622031 • F: +44 1252 626655
sales@catpumps.co.uk • www.catpumps.co.uk